

Electromagnetic locks SHEAR-LOCK
1500 daN flush mounting

SERIES **MF 9003**



STANDARD FEATURE

MF 9003 mounting in aluminium, wood and steel doors for the ultimate in finished appearance.

Both the magnet and the strike plate assembly take up only 38 mm width in the door and the door frame which permits use on nearly all commercial doors.


The MF 9003 also maintains swing through operation on double acting doors and may even be employed on motorised bi-parting doors with a breakaway escape feature.

SELF-ALIGNING OPERATION

Series MF 9003 electromagnetic LOCK is specially designed for use in area school, colleges, public area or industrial area like warehouse, exhibition centre, supermarket, hospital (double action door).

TECHNICAL SPECIFICATIONS

Holding force	1500 daN
Voltage available versions	12Vdc/24 Vdc
Nominal power at 20°C	6W
Protection class	III
Protection rating EN 60529	IP 42

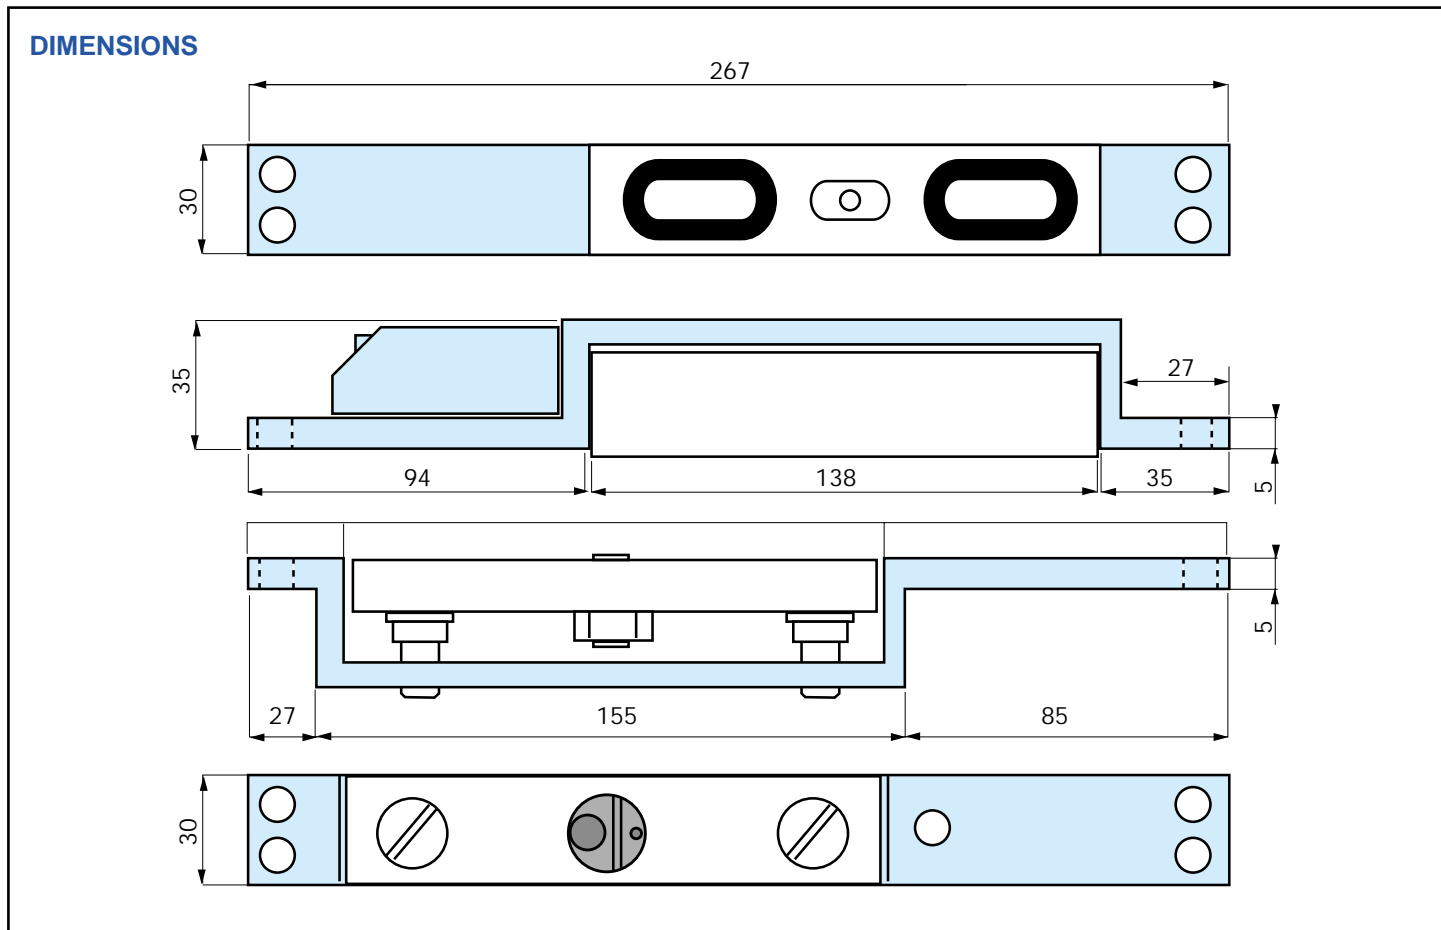

ITEMS	Holding Force	Voltage	Monitoring door position
MF 9003.05	1500 daN	12/24 Vdc – 6 W	yes - with ILS - dry contact

Comsec Protection Systems Ltd., Unit 26, Stadium Business Park, Ballycoolin Road, Dublin 11
 PHONE: (01) 8853008 - FAX: +353 (01) 8853007 EMAIL: info@comsec.ie - WEB:
<http://www.comsec.ie>