



ZP755HA-2

Addressable horn sounder

All around sound

ZP755HA-2 is designed with dual front and rear sound paths, providing an 'all around' sound output - ideal for open area coverage.

Installed directly onto and powered by the ZP wiring loop - ZP755HA-2 enables the system designer to offer a complete ZP3 analogue addressable system on a single pair of wires. Installation time and costs are further reduced as the moulding plugs directly into a first fix base - eliminating the need for any internal connections

The unit's high efficiency acoustic design, together with a low energy, 'sound gun' transducer, enables up to 40 sounders to be connected to a one kilometre loop of 1.5mm² cable, with a wiring run of 50 metres to the first device.

Self test facility

The range features a unique self test facility - automatically activated during routine sounder testing. A built in microphone circuit measures sound output and automatically signals the sounder address and location to the control panel, should the output test fail.


In systems where loop lengths or current requirements are excessive, ZP755 sounders can be powered directly from an external power supply. All ZP755 sounders incorporate switch settings enabling them to be assigned a unique address, which is polled by the panel every two seconds.

Range of sound outputs

Continuous, intermittent and two-tone outputs are available, from which any combination can be chosen to provide alert and evacuate, two stage alarms. Sound types comply with most international codes (e.g. BS 5839 Part 1 recommended frequencies).

The ZP755HA-2 produces a sound output of 102 dBA tested at 1 metre. The volume setting can be reduced for areas where a lower sound output is required.

Moulded in high impact thermoplastic, the sounders are available in either red or white.

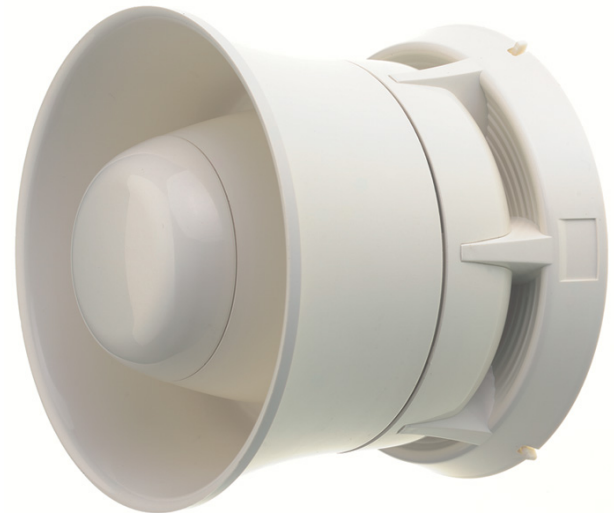

Standard Features



- Wide 'all around' sound distribution
- Microphone self test facility
- Plug in base - no internal connections
- Up to 40 sounders directly on the loop wiring
- High efficiency sound gun transducer
- Synchronised outputs

ZP755HA-2

Addressable horn sounder

Specifications

Model No	ZP755HA-2R (red), ZP755HA-2W (white)
Specification	EN54 Pt3
Description	Addressable horn-sounder
Compatibility	All ZP3 systems, note - sound options may vary for ZP5 and ZP3 systems with early software versions.
Mounting	Surface with plug in base - SPB-R (red), SPB-W (white)
Wiring	2 core loop
Monitoring	Open and short circuit fault, sound level - self test facility
Sound output	102dBA (at 1m)
Sound types	Tone 1 - continuous 980 Hz Tone 2 - intermittent 980 Hz (0.5 secs on/off) Tone 3 - two tone warble 980 Hz/670 Hz
Operating voltage	Loop 19.5 - 20.5 Vdc, External 24 Vdc (nominal)
Current	600uA quiescent, 5.5mA active
Max number	40 per 1km loop (1.5mm ² cable, 50m to first device)
Application	Indoor installation
EN60529 rating	IP50
Operating temperature	-10°C to +55°C
Humidity range (at 40oC)	10% to 95% RH (non condensing)
EMC	CPD compliant
Material	Moulded thermoplastic
Dimensions	127mm (Dia) x 112mm (D) overall
Colour	Red or white
Weight	339g (including base)
Publication No	PS1777

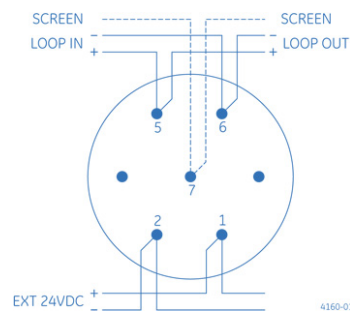

Ordering Information

Part No.	Description
ZP755HA-2	Addressable horn sounder

As a company of innovation, GE Security reserves the right to change product specifications without notice. For the latest product specifications, visit GE Security online or contact your GE Security sales representative.

IPS-ZP755HA-2-2007-07-31 11:10:43 Released : 16.07.2007

UK Sales: 8 Newmarket Court, Chippenham Drive, Kingston, Milton Keynes, MK10 0AQ, United Kingdom, Telephone +44 (0) 1908 281981, Fax +44 (0) 1908 282554
South Africa: Zitton House, 555 Voortrekker Road, Maitland, 7405, P.O. Box 181, Maitland, 7404, South Africa, Telephone +27 (0)21 506 6000, Fax +27 (0)21 506 6050