

## ZP720-3P

### ZP7 Series Addressable Thermal Detector - POLAR WHITE

#### General

The ZP720-3P addressable thermal detector is a POLAR WHITE, thermistor controlled device that responds to changes in its ambient temperature. The device provides a reliable response to fires in areas where environmental conditions may prohibit the use of smoke detectors.

The sensitivity of each detector is set by the ZP control panel and can be adjusted between four levels ranging between 58°C and 75°C - either manually or automatically on a timed basis. At sensitivity level two, the ZP720-3 fully meets the requirements of EN54 Pt 5 (grade 1) and is approved by several international approval bodies. Temperature levels are continuously sensed by the unit and transmitted via the ZP wiring loop as electronic signals, which are assessed and verified by the control panel prior to any alarm decision being taken.

#### Automatic self test

Detector sensitivity, calibration and self test are carried out automatically by the ZP system. Removal or replacement of an incorrect sensing device will be identified by the system and shown as a fault.

Up to 127 sensing devices may be connected to each of the control panel loops. All loop devices incorporate switch settings enabling them to be given a unique address, which is polled by the panel every two seconds.

#### Locking base option

The low profile moulding together with either surface or recessed bases makes the unit ideal for both commercial and industrial interiors. A red LED indicator situated on the sensor moulding, flashes to indicate when the unit is in alarm.

For ease of removal, detectors plug into a range of base units by a simple twist and lock action. A site selectable option is provided to lock the detector into its base. Once applied, the unit can only be removed by means of a special tool.

Space for address labels is provided on detector and base mouldings ensuring that units are replaced in their correct location and that address numbers can be identified from floor level.



#### Standard Features



- Analogue sensing - reduces false and unwanted alarms
- Addressable - system knows the status and location of every sensor
- Automatic self test
- EN54 Part 5 approved and CPD certified

### Specifications

Model No	ZP720-3P
Specification	EN54 Pt5
Compatibility	ZP2 addressable systems ZP3 addressable systems running SW71910 version 3.xx software
Sensitivity	Level 1 - 58°C fixed temperature Level 2 - 58°C rate compensated Level 3 - 75°C rate of rise Level 4 - 75°C fixed temperature
Mounting	Plugs into surface or semi recessed base
Area Coverage	50m <sup>2</sup> - subject to local codes
Wiring	2 core loop or spur
Monitoring	Open and short circuit fault, detector removal and device type
Indication	Alarm LED (red)
Operating voltage	Address line pulsed 20V (19.5V to 20.5V). Max line less 4V
Operating temp	58°C to 75°C (4 software settings)
Current	600microA quiescent, 700microA alarm
Addressing method	7 way DIL switches in head
Application	Indoor installation
EN60529 rating	IP32
Temperature range	-10°C to +75°C
Humidity range	20% to 95% RH (non condensing)
EMC	CE marked (EEC89/336)
Material	Moulded ABS
Dimensions	106mm (dia) x 52mm (h) (excluding base)
Height	60mm ZP7-SB1 surface base 38mm ZP7-RB1 recessed base
Colour	Polar White
Weight	85g (excluding base)

### Ordering Information

Part No.	Description
ZP720-3P	ZP7 Series Addressable Thermal Detector - POLAR WHITE
ZP7-IB-P	ZP7 Series Addressable Detector Isolator Base - POLAR WHITE
ZP7-RB1-P	ZP7 Series Addressable Detector Base, Recessed Mounting - POLAR WHITE
ZP7-SB1-P	ZP7 Series Addressable Detector Base, Surface Mounting - POLAR WHITE

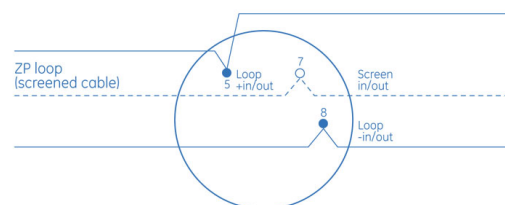

ZP7-SB1 / ZP7-RB1 Sensor base

414600-01